



Bench with ductile iron legs, backrest and seat treated with Ferrus, a protective process that guarantees high resistance to corrosion.

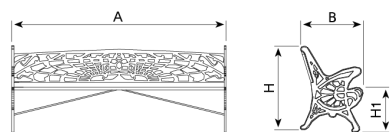

Ref.	A	B	H	H1
UM388	2085	590	800	400




[Maintenance guide](#) | [Project sheet](#) | [CAD](#) | [Catalogue](#) | [Mounting instructions](#) | [BIM](#) | [HD image](#)



The Ferrus treatment consists of three layers applied after shot cleaning all impurities: an electrolytic bath, an epoxy coating and a forge black polyester paint coating.

Recommended anchoring: by means of M10 expansion bolts depending on the surface and the project.

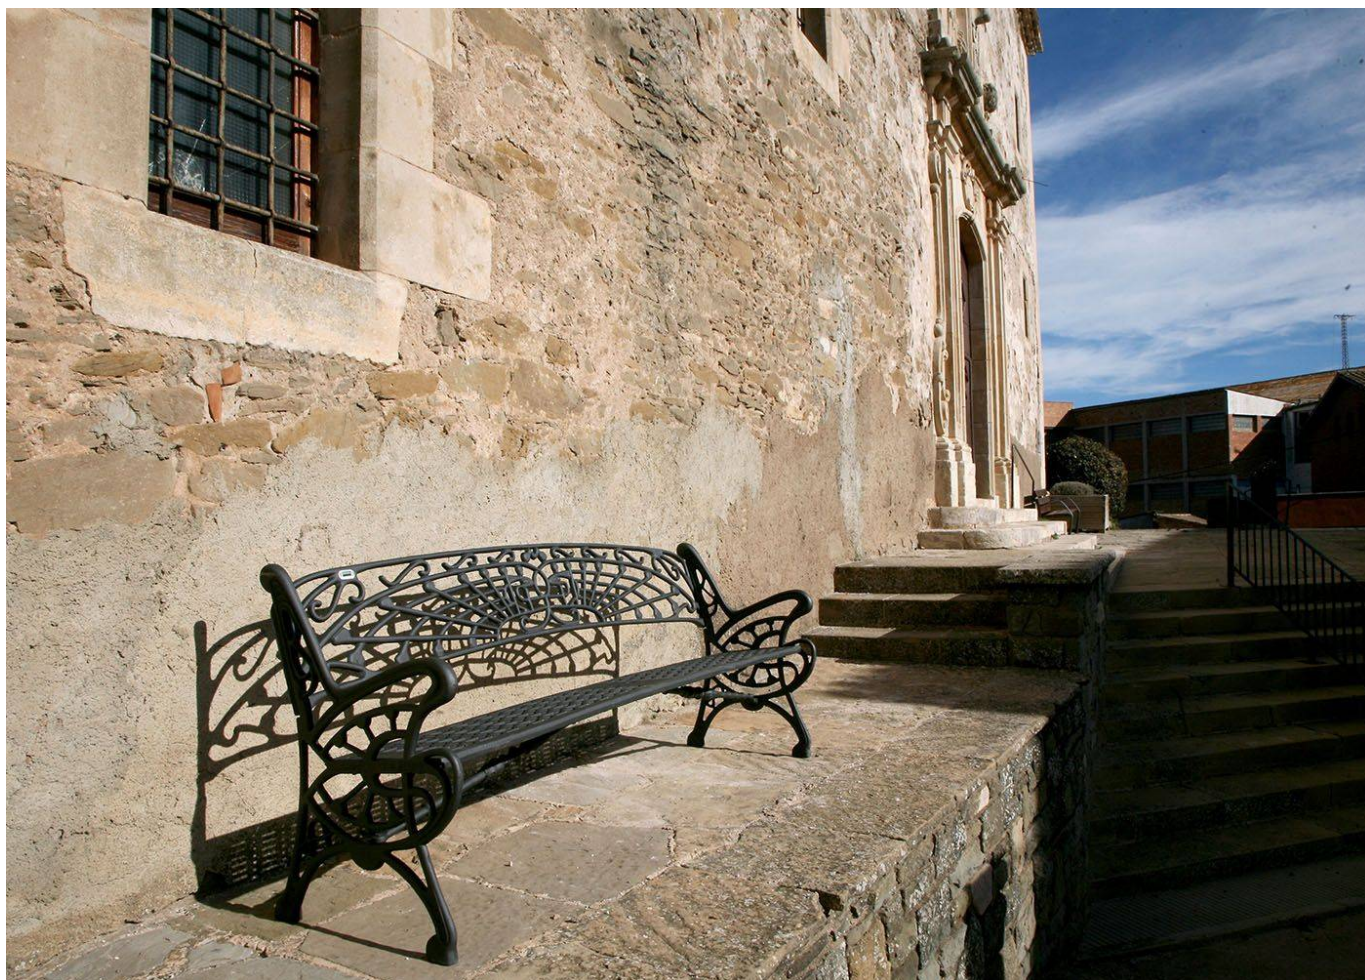

**BENITO**

[info@benito.com](mailto:info@benito.com)  
tel. 93 852 1000